




SMART LIFT 2.50 SL

5000 KG

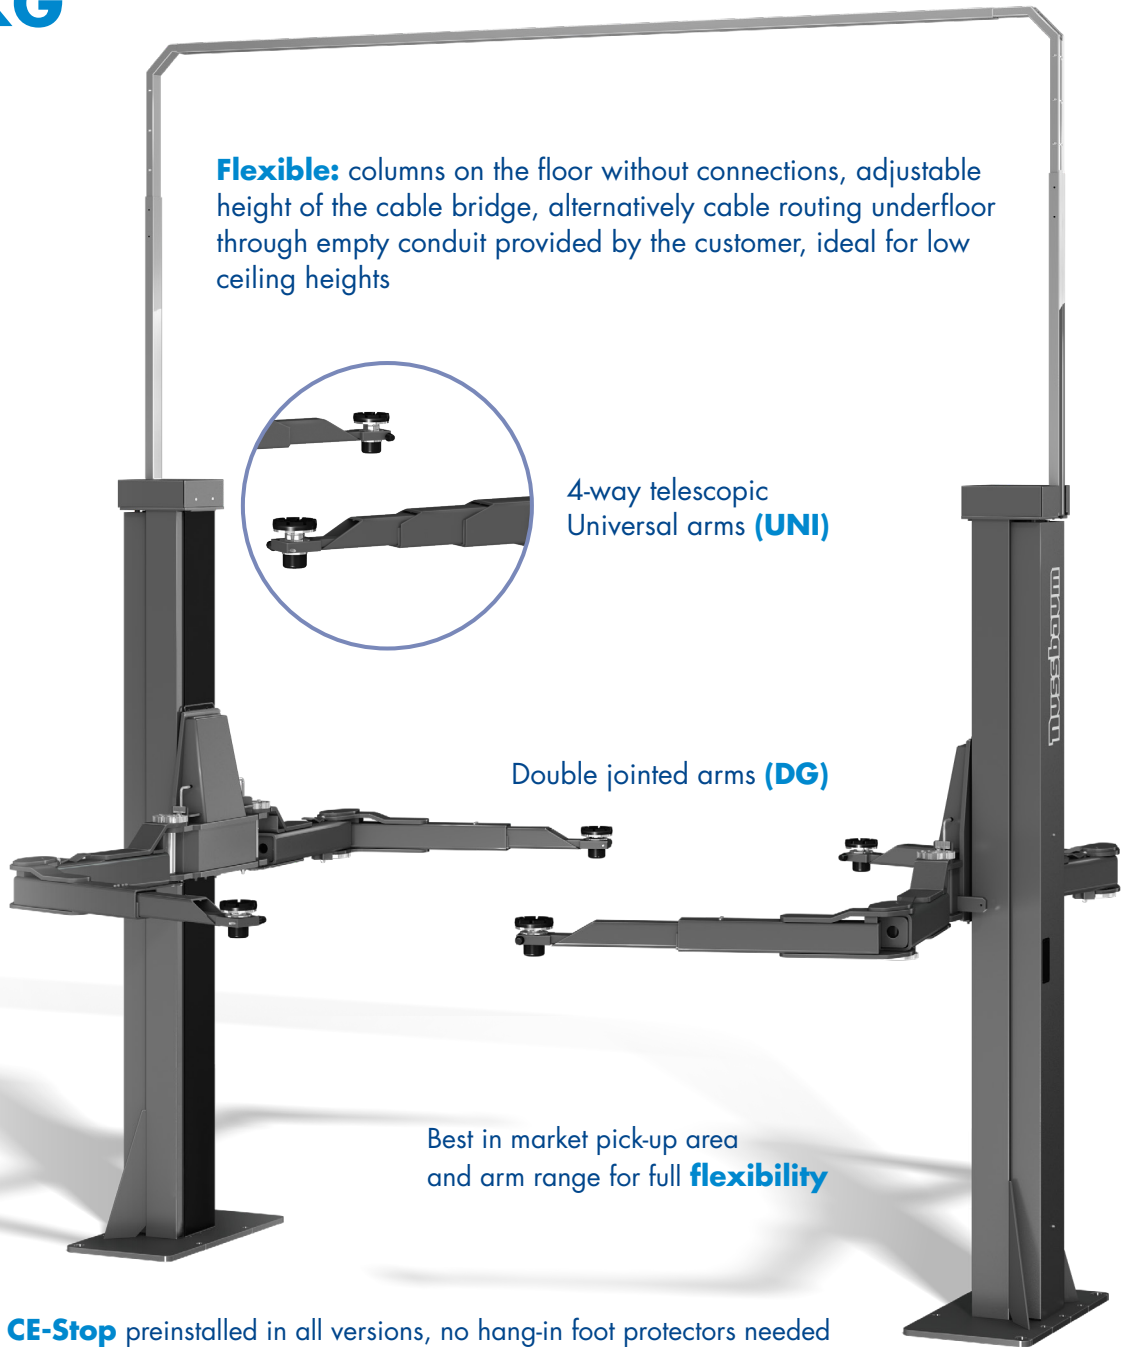

THE ORIGINAL NUSSBAUM LIFT

- Flexible height : Ideal for workshops with low ceilings
- Asymmetrical support arms for optimum door clearance
- Low space requirement


The original among the (mechanical) 2-post lifts

SPACE-SAVING, FLEXIBLE, PERFECT FOR LOW CEILING HEIGHTS




Options:

- Energy set
- Second operation (only if value possible)
- Wheel forks, Mini-Max & adapters sets

UNI - Universal arm

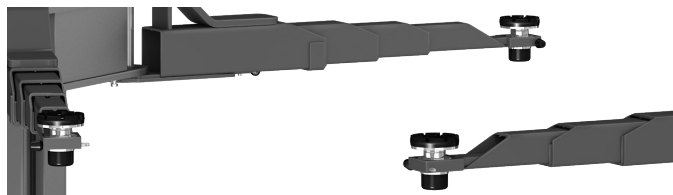

DG - Double joint arm

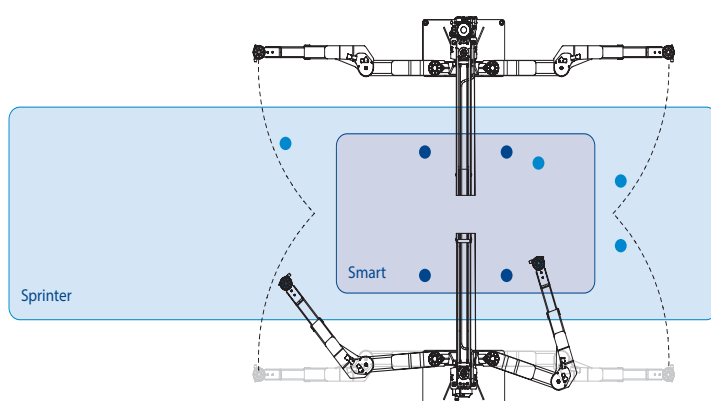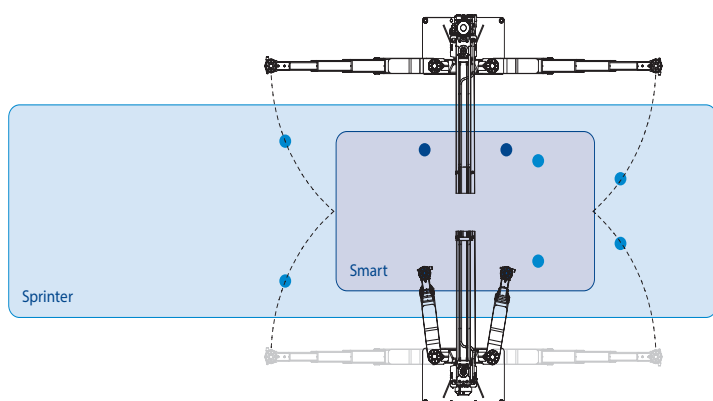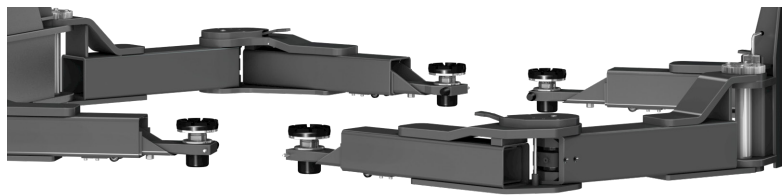

SMART LIFT 2.50 SL	UNI	DG
Lifting capacity (kg)	5000	5000
Lifting time approx. (sec)	48 / 40	48 / 40
Lifting height (mm)	2022	2014
Lowest lifting point (mm)	129-204	121-196
Arm-extraction (mm)	695-1700	max. 1833
Total height (mm)	4468	4468
Min. Drive-through width (mm)	2845	2845
Column distance (mm)	3124	3124
Recommended total width (mm)	3750	3750
Total width (mm)	3750	4550
Power supply (V/Hz/A)	400 / 50 / 16	400 / 50 / 16
Motor (kW)	2x1,5	2x1,5



Wheel-fork adapter



Height adapter round



Adapters for MERCEDES Sprinter



Height adapter U-form



Mini-Max adapter

**Additional
accessories
available**