




SMART LIFT 2.55 SL

5500 KG

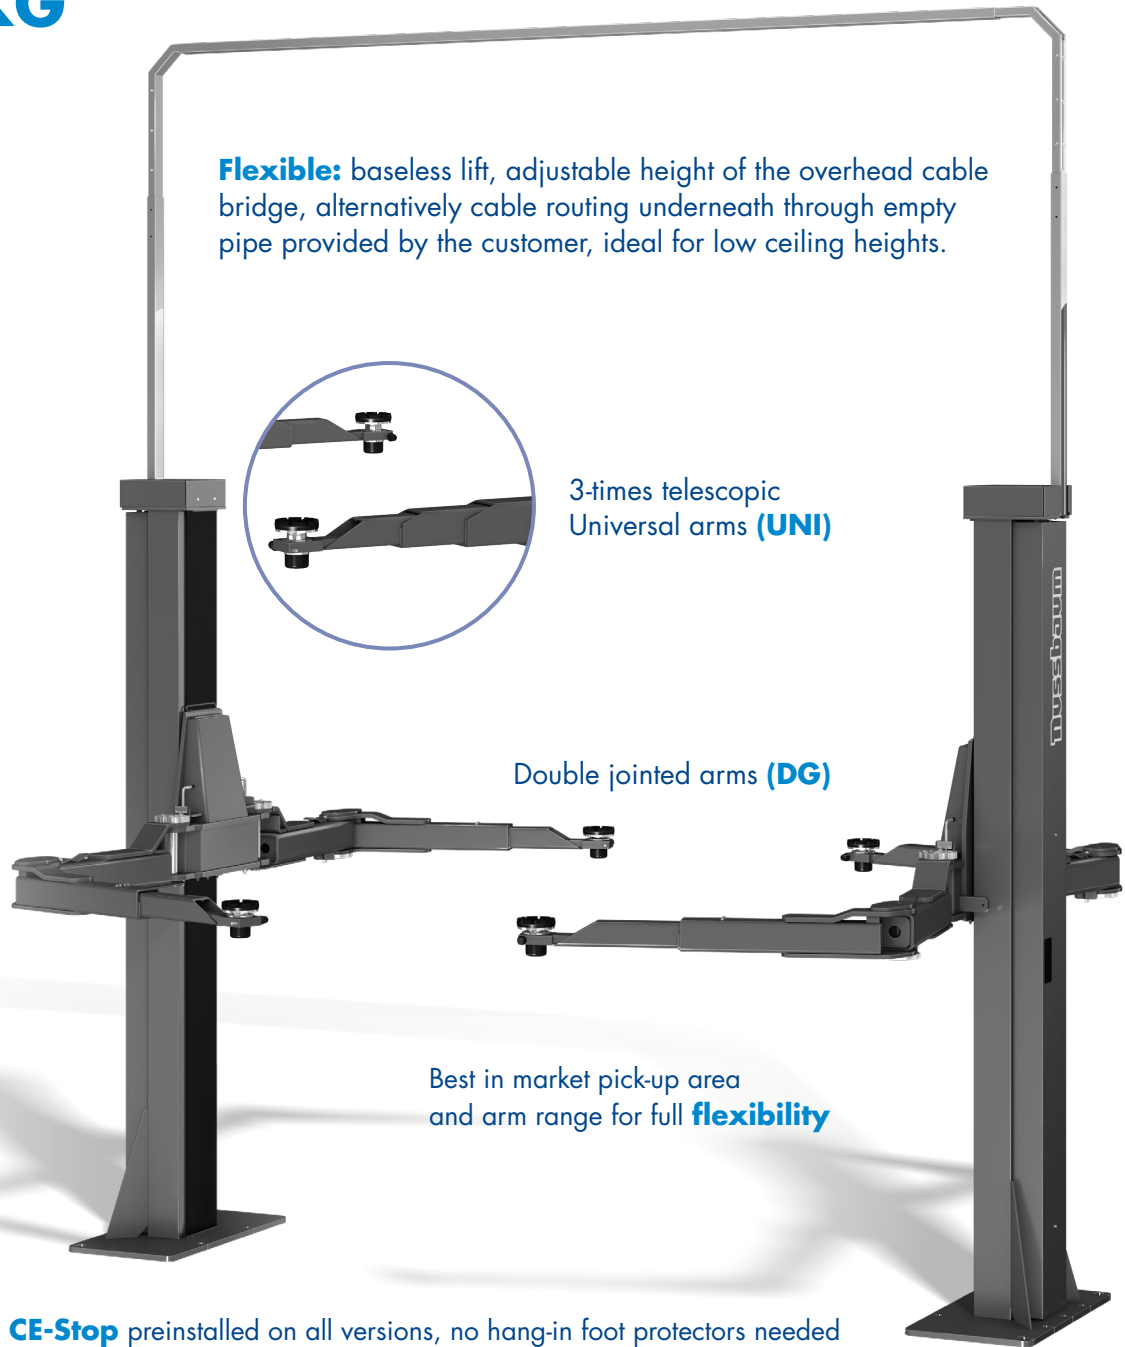

THE ORIGINAL NUSSBAUM LIFT

- Flexible height : Ideal for workshops with low ceilings
- Double-jointed arms for a wide lifting range (DG version)
- Space saving design


The original among the (mechanical) 2-post lifts

SPACE-SAVING, FLEXIBLE, PERFECT FOR LOW CEILING HEIGHTS




Options:

- Energy set
- Control unit on both columns (retrofit not possible)
- Wheel forks, Mini-Max & adapters sets

UNI - Universal arm

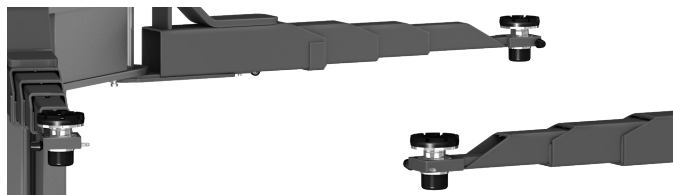

DG - Double jointed arm

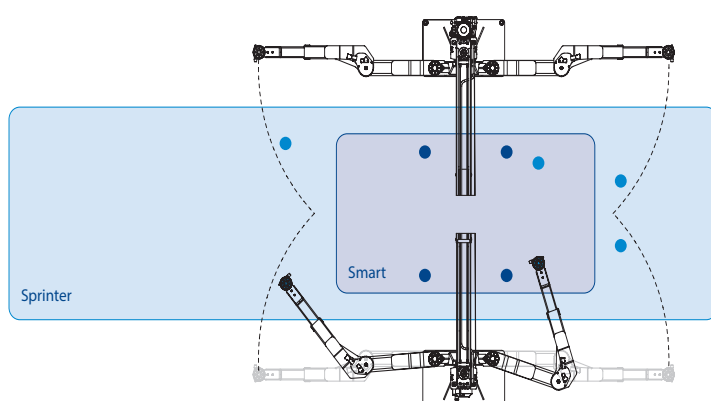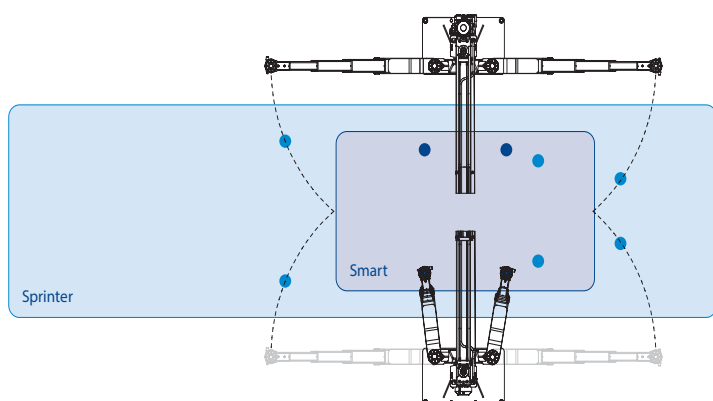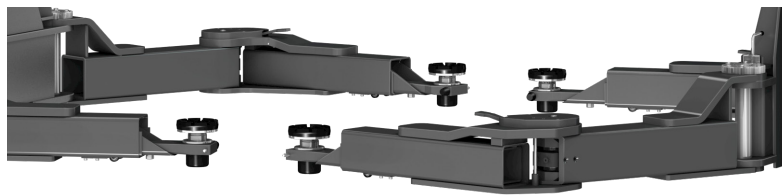

SMART LIFT 2.55 SL	UNI	DG
Lifting capacity (kg)	5500	5500
Lifting time approx. (sec)	48 / 40	48 / 40
Lifting height (mm)	2015	2014
Lowest lifting point (mm)	133-198	121-196
Arm-extraction (mm)	695-1700	max. 1833
Total height (mm)	4778	4778
Min. Drive-through width (mm)	2520	2520
Column distance (mm)	2850	2850
Recommended total width (mm)	3570	3570
Total width (mm)	3570	4370
Power supply (V/Hz/A)	400 / 50 / 16	400 / 50 / 16
Motor (kW)	2x1,5	2x1,5



Wheel-fork adapter



Height adapter round



Adapters for MERCEDES Sprinter



Height adapter U-form



Mini-Max adapter

Additional accessories available