


## INGROUND 2-PISTON LIFT

# TOP LIFT 2.35 TLK-L

### FLUSH MOUNTED

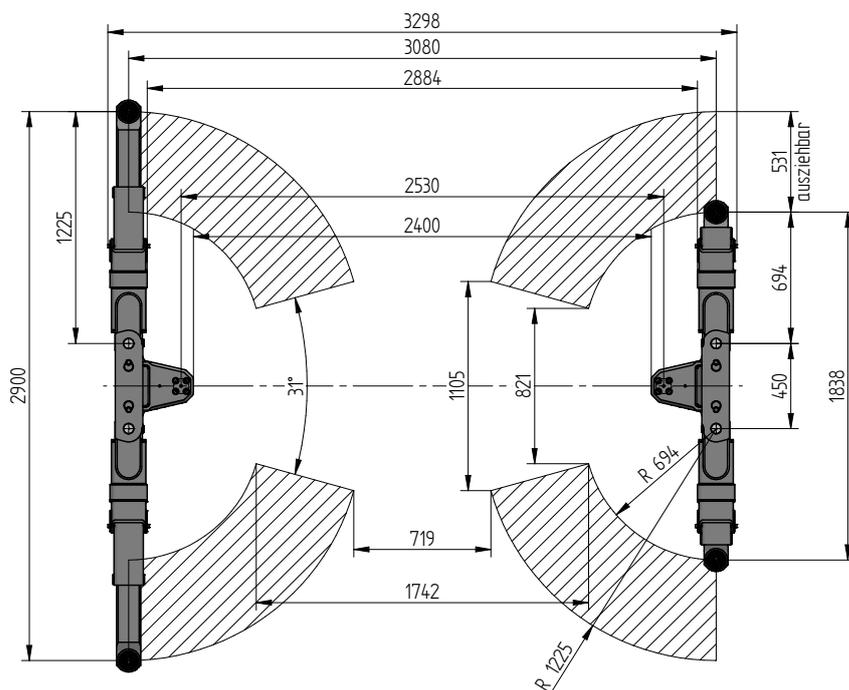

## TECHNICAL DATA

Capacity	3500 kg
Effective raise height	2048 mm
Move in height	90 mm
Piston diameter	123 mm
Piston distance	2530 mm
Installation depth	2408 mm
Motor output	3,0 kW
Power connector	400 V/16 A
Cable length to control	11 m
Lifting time	≈ 35 sec.
Lowering time	≈ 35 sec.

Arms 2.35 TLK-L 0015743


Installation cassette 2530 mm

Lifting unit 3,5 + 2530 mm - K  
pre-assembled in installation cassette

Surround frame 2.35 TLK-L 2530




## ACCESSORIES




1

1 | Stacking adapter extension  
89 mm  
d 50 x 89 mm  
0016747 (1Set / 4 Pieces)




2

2 | Stacking adapter extension  
127 mm  
d 50 x 127 mm  
0016746 (1Set / 4 Pieces)




3

3 | Stacking adapter V-shape  
d 50 / 87 - 130 mm  
0016748 (1Set / 4 Pieces)



4

4 | Stacking adapter U-form  
d 50  
0016749 (1Set / 4 Pieces)



Bracket for stacking-adapter extension  
0016751



Rim protector  
0015746 (1Set / 2 Pieces)



Wheel fork adapter 2.35 TLK  
0016752 (1Set / 4 Pieces)